

Fire Dampers Medium - High Velocity

Description

Our range of fire dampers are designed to stop the spread of fire through ductwork, walls, floors and ceilings. All fire dampers are fire tested to BS 476 part 20:1987 for four hour duration and are available with optional installation frame. The fire damper is suitable for medium to high velocity systems as the blades are held out of the airstream.

Construction

The casing is manufactured from 1.6mm galvanised mild steel whilst blades are rollformed from 0.8mm galvanised mild steel as standard. Grade 430, 304 & 316 stainless steel casing and blades are available as an option.

Size

From 100 x 100 to 1000 x 1000 in one module. Multiple assemblies can be supplied.

How to Specify




STATE QUANTITY, THE PRODUCT CODING AND THE SIZE WIDTH X HEIGHT

e.g. 10 Qty. DB8G0+00 300 x 100.




Product Type	Construction	Options
DB8 Square / Rectangular Spigot Blades Out Of Airstream	G Galvanised Steel	0 None
	M Galv. Casing S/Steel Blades	F HEVAC Installation Frame
	S S/Steel Casing S/Steel Blades	

Control	Options
0 72" Fusible Link	0 None
1 Gate Latch Release	V Visual Blade Position Indicator
2 Solenoid (AC Voltage)	1 Single Pole Microswitch
3 Electro-Magnet (AC & DC)	2 Double Pole Microswitch

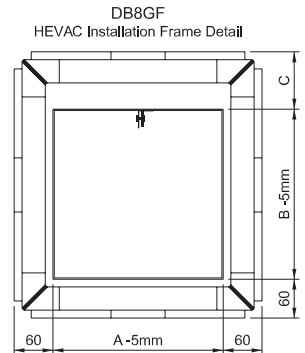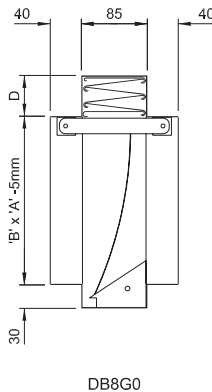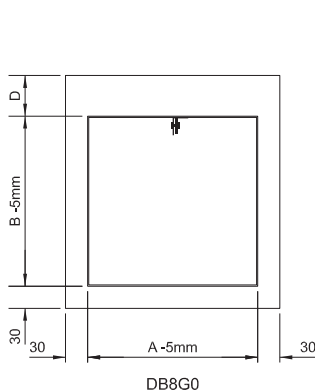

Duct H (B)	Dimensions (mm)	
	'D'	'C'
100 - 300	30	60
301 - 500	55	85
501 - 750	75	105
751 - 1000	95	125



HEVAC / HVCA Installation Frame

Fire Dampers Medium - High Velocity

Description

Our range of fire dampers are designed to stop the spread of fire through ductwork, walls, floors and ceilings. All fire dampers are fire tested to BS 476 part 20:1987 for four hour duration and are available with optional installation frame. The fire damper is suitable for medium to high velocity systems as the blades are held out of the airstream.

Construction


The casing is manufactured from 1.6mm galvanised mild steel whilst blades are rollformed from 0.8mm galvanised mild steel as standard. Grade 430, 304 & 316 stainless steel casing and blades are available as an option.

Size

From 100 to 1000 diameter in one module for circular spigots.
 From 100 x 100 to 1200 x 1000 in one module for flat oval spigots.
 Multiple assemblies can be supplied.

How to Specify




STATE QUANTITY, THE PRODUCT CODING AND THE SIZE WIDTH X HEIGHT
 e.g. 10 Qty. DC8G0+00 300 diameter.

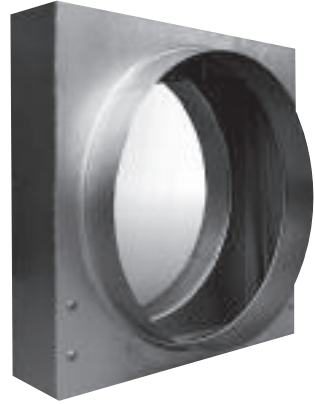


Product Type	Construction	Options
DC8 Circular Spigot Blades Out Of Airstream	G Galvanised Steel	0 None
DD8 Flat Oval Spigot Blades Out Of Airstream	M Galv. Casing S/Steel Blades	F HEVAC Installation Frame
	S S/Steel Casing S/Steel Blades	



Control	Options
0 72° Fusible Link	0 None
1 Gate Latch Release	V Visual Blade Position Indicator
2 Solenoid (AC Voltage)	1 Single Pole Microswitch
3 Electro-Magnet (AC & DC)	2 Double Pole Microswitch

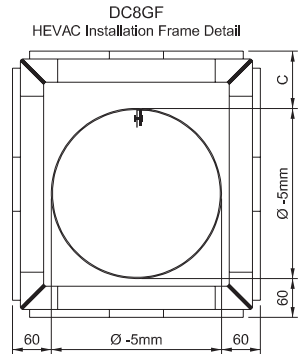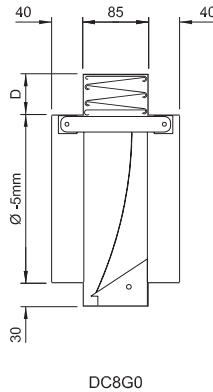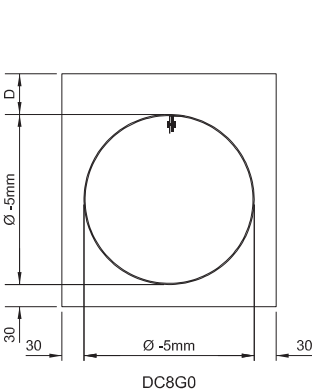

Duct Dia (Ø)	Dimensions (mm)	
	'D'	'C'
100 - 300	30	60
301 - 500	55	85
501 - 750	75	105
751 - 1000	95	125



HEVAC / HVCA Installation Frame

Technical Data Fire Dampers

Fusible Link (Code '+0')

Blades are held in the open position by a straight bar link (fitted as standard) rated at 72°C (180°F). The fusing alloy is to BS 219. The brass is to BS 2870 and is electro-tinned following this process. Alternative high temperature ratings available: 95°C, 124°C, 145°C, 182°C.

Gate Latch Release (Code '+1')

Optional mechanism for electrical release when required. Rated 72°C (180°F). Alternative ratings available as per standard fusible link.

Mechanical Visual Indicator (Code 'V')

To provide local indication of the blade status. When the indicator appears in the bulb, this shows that the blades have closed.

Single Pole Microswitch (Code '1')

To provide remote indication of the blade status. As the leading blade travels to the locking ramp, it contacts the arm and operates the switch. Factory fitted.

Double Pole Microswitch (Code '2')

Operates as above but with two switches for double pole operation. Can also provide a signal to a control panel enabling isolation of plant in case of fire. Factory fitted.

Solenoid (De-Energised) 240 volt (Code '+2')


The remote mounted solenoid is designed for use with 'normally de-energised' systems and releases when a 240 volt AC detector signal is applied. To suit damper sizes: 150 x 150 - 1200 x 1000 and 150 - 1000 diameter.

Electro-Magnet (Energised) 24 volt (Code '+3')


The remote mounted Electro-Magnet option is designed for use with 'normally energised' systems and releases upon interruption of the power supply. To suit damper sizes: 150 x 150 - 1200 x 1000 and 150 - 1000 diameter.

Dry Lining Partition Walls

Note: The methods detailed below are proposed methods only. Acceptance must be sought from the specifying authority prior to ordering or installation. These options must be factory fitted prior to despatch.

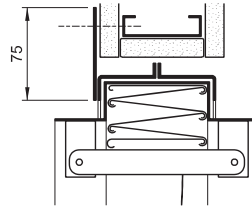

HEVAC Frame with Dry Liner Plate

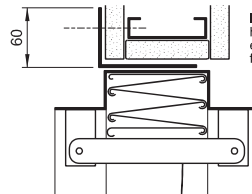

It is recommended that slotted holes are inserted for linear expansion within this angle frame flange.

Angle Frame Method

Pressure Loss (Total Pa)

Duct Velocity (M/s)	1	2	3	4	5	6	7	8	9	10	15
Low - Medium 150 x 150	1	3	6	10	15	20	28	33	39	44	60
91 - 95% Free Area 1000 x 1000	-	-	2	3	4	5	6	8	9	10	15

Duct Velocity (M/s)	3	4	6	8	10	20	30	40	50		
Medium - High 150 x 150	2	4	8	16	23	70	200	-	-		
100% Free Area 1000 x 1000	-	-	3	5	6	20	50	100	180		

Weight Chart (Kg)

Damper Height (mm)	Damper Width (mm)									
	100	200	300	400	500	600	700	800	900	1000
100	2.0	3.0	4.0	5.0	6.5	7.0	8.0	9.0	9.5	10.0
200	3.0	3.5	4.0	5.0	7.0	8.0	9.0	10.0	11.0	12.0
300	3.5	4.0	4.5	5.5	7.0	9.0	9.5	10.5	12.0	13.0
400	4.0	5.0	5.5	6.0	7.5	10.0	11.0	12.0	13.0	14.0
500	5.0	6.0	7.0	7.5	8.5	11.0	12.0	13.0	15.0	16.0
600	6.0	7.0	8.0	8.0	9.5	12.0	13.0	14.0	16.0	17.0
700	7.0	8.0	9.0	9.5	10.5	13.0	14.0	15.0	17.0	18.0
800	8.0	9.0	10.0	10.0	12.0	14.0	15.0	16.0	18.0	19.0
900	9.0	10.0	11.5	12.0	14.0	15.0	15.5	17.0	18.0	20.0
1000	10.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	20.0	22.0

For dampers with installation frames - Multiply by 1.25.

For circular and flat/oval dampers - Multiply by 1.25.

For circular and flat/oval dampers with installation frames - Multiply by 1.50.