


# Fixing Options


## Fixings

### + 1 Flange Holes

Countersunk flange holes for frames S & A to take zinc plated No. 6 self tapping screws. Colour coded screws are provided where B & C finish is specified.




+1' Fixing  
'S' Frame




+1' Fixing  
'A' Frame

### + 2 Neck Fixings

Concealed fixing through the neck of grille by others.  
External fixing where access allows.  
Internal fixings for hinged and removable core products.




External Neck Fixings



Internal Neck Fixings


### + 3 Spring Friction Clips

Concealed spring friction clips at regular spacings.  
Only suitable for mounting into window cill or perimeter casing etc....




### + 4 External Lugs

External rear fixing brackets to take suspension wires or 6.0mm drop rods.




### + 9 Internal Lugs

Internal rear fixing brackets to take suspension wires or 6.0mm drop rods.  
Only suitable for hinged and removable core products.




### + 5 Clip-In T-Bar

Frame clips to snap into concealed split T-Bar metal tile systems. Can be produced to suit bevel or square tile systems.  
Check compatibility of clips with factory prior to specifying




Bevel Edged Tile System



Square Edged Tile System


### + 6 Lay - In Tile Replacer

Inverted lay-in T-Bar system.  
Rear suspension lugs are fitted to round neck tile replacement products as standard. Refer to product information for appropriate weights.




### + 7 Sub - Frame

Factory fitted quick release quarter turn fasteners and corresponding rear sub-frame of heavy gauge galvanised steel.




### + 8 Concealed Rear Bracket

Concealed rear fixing bracket method, suitable for wall, cill, ceiling or floor mounted products.  
Two part bracket supplied, complete with machine screw and threaded insert.




# Frame Style Options


**Frame Style**  
**S** 30mm Flange




**N** 21mm Flange




**B** 32mm Bevel Edged Frame



**A** 35mm Surface Mount



**C** Channel Frame




Refer to product information page for Dimension 'd'

# Core Options

**H** Hinged Core


Hinged core with twin concealed roller catches.

Optional press to release 'touch catches' can also be provided. Safety retaining wires can be fitted on request. Contact sales office for size limits.

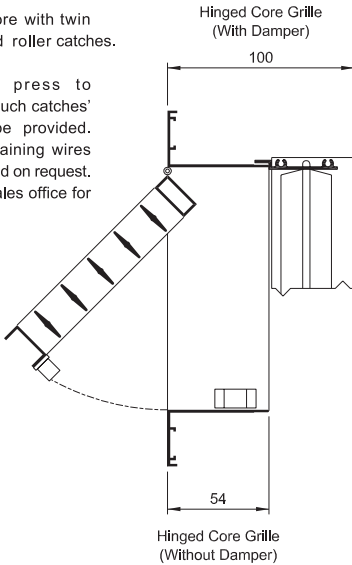


**R** Removable Core

Fully removable core with 4 qty. concealed roller catches. Safety retaining wires are fitted as standard. Not recommended for ceiling mounted applications. Contact sales office for size limits.

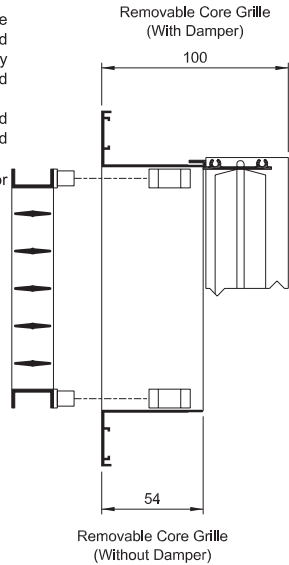

**S** Spring Release Core


Spring loaded quick-release core. Push core up or down to activate spring pins. Safety retaining wires can be fitted on request. Contact sales office for size limits.

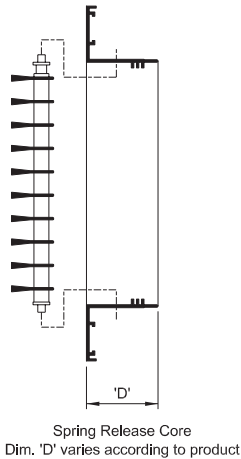

Spring Release Core  
Dim. 'D' varies according to product

**+** Rear Filter Housing

Removable or hinged core products can be factory fitted with rear housing to accept filters. To specify, state product code, '+Rear Filter Housing' and give filter thickness and type. Contact sales office for size limits.

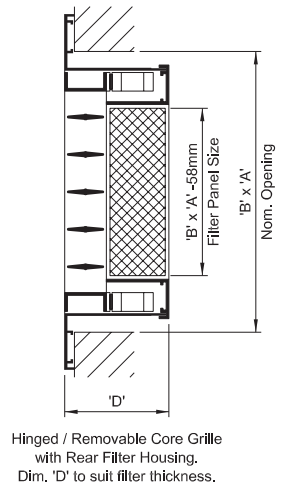

Hinged / Removable Core Grille with Rear Filter Housing.  
Dim. 'D' to suit filter thickness.