

Heavy Duty Back Draught Dampers

Description

For low pressure relief applications, typically 10-50 pa, or as a non-return valve. Used where air velocities of up to 10 m/s may occur.

Construction

Galvanised mild steel casing either flanged or spigotted, extruded aluminium blades with brush seal tips.

Size

From 200 x 100 to 1000 x 1000 in 25mm increments. For larger sizes multiple assemblies can be supplied.

How to Specify

STATE QUANTITY, THE PRODUCT CODING AND THE SIZE WIDTH X HEIGHT



e.g. 10 Qty, DP100+1M 300 x 300.



Product Type	Connection	Options	Accessories
DP Back Draught Damper	1 Flanged Casing	0 Outwards Airflow	0 None
	2 Flanged Frame	1 Inwards Airflow	
	3 Rectangular Spigot		
	4 Circular Spigot		






Seals	Finish
0 Blade Edge Brush Seal	M Galvanised Case Aluminium Blades
1 Blade Edge Brush + Aluminium Jamb Seals	

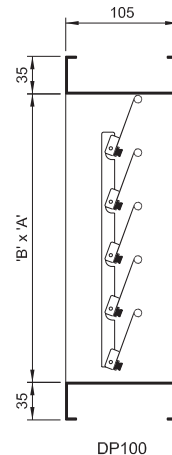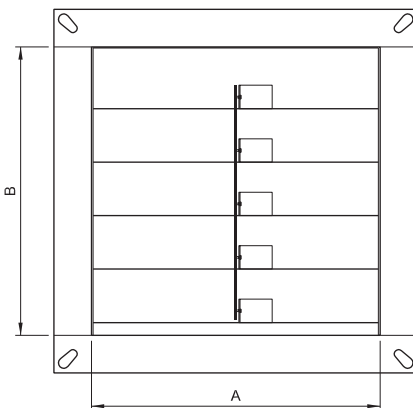



Heavy Duty Back Draught Dampers

DP2

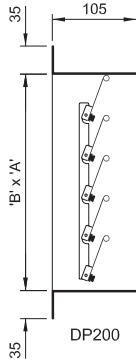

Type DP 200 + DP210 if the neck is to fit within a structural opening, order the damper - 20mm smaller than the opening size.

DP3

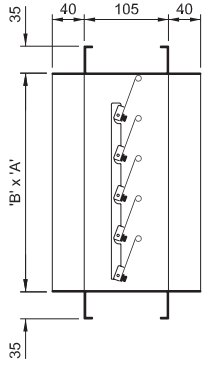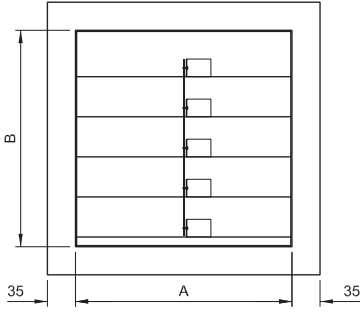

DP4

